

AGRI

Way

MOUNTED SUBSOILERS **SOUS SOULEUSES PORTEES** **RIPUNTATORI PORTATI**



SB/SB-A series

Model/Modèle/Modello *SB5P*



For tractors from 40 to 160HP

STANDARD EQUIPMENT

- 3-point hitch
- Shear bolt on each shank
- Reversible and replaceable points
- Fixed tines on SB series; adjustable tines on SB-A series

ON DEMAND

- * Depth control wheels
- * Shank with wings
- * Rear roller



Pour tracteurs de 40 à 160 cv

EQUIPMENT STANDARD

- Attelage 3-points
- Sécurité boulon sur chaque dent
- Pointes reversibles et remplaçables
- Dents fixes pour les modèles SB; dents réglables sur les modèles SB-A

SUR DEMANDE

- * Roue de réglage profondeur
- * Dents avec ailes
- * Rouleau arrière



Per trattori da 40 a 160 CV

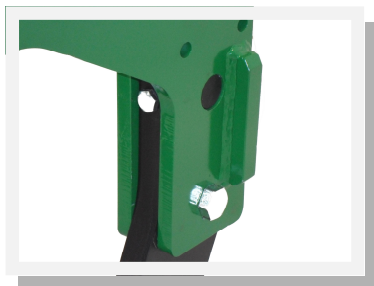
DI SERIE

- Attacco a 3 punti
- Bullone di sicurezza su ogni dente
- Punte reversibili e sostituibili
- Denti fissi sulla serie SB; denti registrabili sulla serie SB-A

SUR DEMANDE

- * Ruotine regolazione profondità
- * Denti con alette
- * Rullo posteriore

Shear bolt
Boulon de sécurité
Bullone di sicurezza








Shank wings and iron depth control wheels
Dents avec ailes, paire de roues de réglage profondeur en fer
Zappette inter-ancora e ruotine di regolazione profondità in ferro



R= CONVERTIBLE (2 LATERAL EXTENSIONS);
 REDUCIBLE (2 RALLONGES LATÉRALES);
 RIDUCIBILE (2 PROLUNGHE LATERALI)

*

Mod.					
FIXED TINES – DENTS FIXES-DENTI FISSI					
SB3L	3	95 cm	20-30 cm	200	40/50 HP
SB5L	5	190 cm	20-30 cm	305	50/70 HP
SB3S	3	97 cm	30-40 cm	245	50/70 HP
SB5S	5	200 cm	30-40 cm	380	70/90 HP
SB5S-R*	5 (3+2)	200 cm	30-40 cm	410	70/90 HP
SB7S-R*	7 (5+2)	300 cm	30-40 cm	545	80/100 HP
SB5P	5	220 cm	40-60 cm	570	90/120 HP
SB7P-R*	7 (5+2)	330 cm	40-60 cm	815	120/160 HP
ADJUSTABLE TINES – DENTS REGLABLES – DENTI REGISTRABILI**					
SB5L-A	5	185 cm	30-40 cm	350	50/70 HP
SB5S-A	5	190 cm	40-50 cm	420	60/80 HP
SB5M-A	5	210 cm	40-50 cm	430	70/100 HP



**

MODEL/MODELE/MODELLO

SB5S-A